



**NT-5 BOLTED COVER TANK**

**NT-4 WELDED COVER TANK**

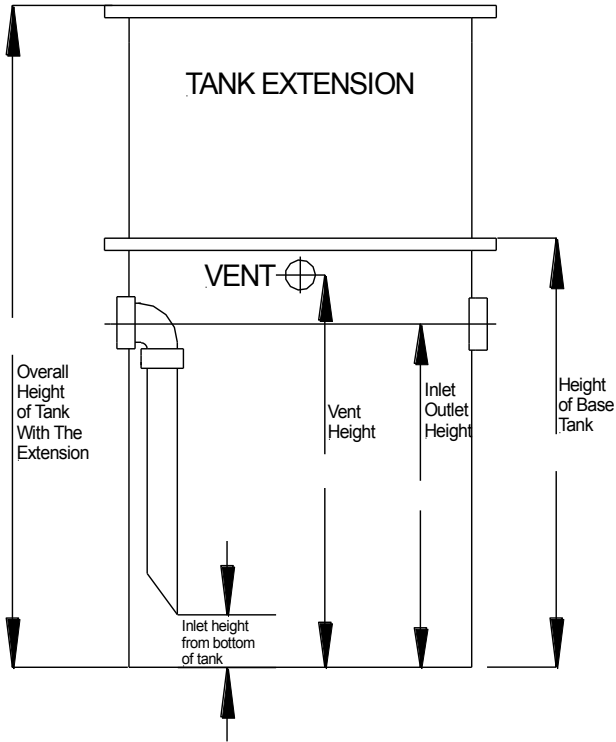

TOP VIEW FOR INLET/OUTLET LOCATIONS

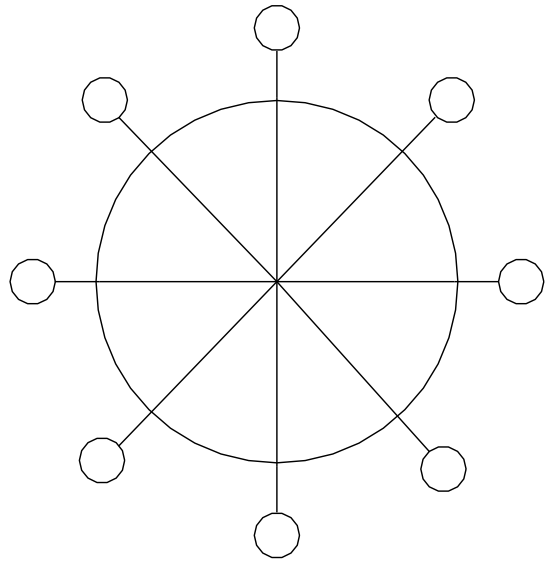

Cylindrical Style Tank WITH TANK EXTENSION <input type="checkbox"/> NT-5 BOLTED COVER <input type="checkbox"/> NT-4 WELDED COVER	TANK _____
	P.O. No. _____
	No. OF TANKS _____
	TANK SIZE _____

CONNECTIONS	
TYPE	SIZE
INLET _____	_____
OUTLET _____	_____
VENT _____	<input type="checkbox"/> TOP <input type="checkbox"/> SIDE

Tank Extensions any cylindrical style tank can be extended from the same polyethylene material. Both full size and smaller extensions are available. Your Scientific Plastics representative can size the necessary extension. Tanks with extensions, that are going to be buried, should be placed in vault or a pipe sleeve. Tank covers are non load bearing.

Tanks should be of seamless construction, rotationally molded in the USA. From HD polyethylene resin conforming to ASTM D-1998-06 and ASTM D-4976. External fittings conforming to ASTM F-1412, shall be polyfused and/or welded to the tank, and be provided with the inlet dip pipe extending down to the bottom. The effluent must be discharged at the bottom of the tank to maximize dwell time. Covers are either bolted down or welded to the tank. The inside bottom of the tank shall be flat with no recessed areas where acid waste or other contaminants can pool.